


INCRETE THIN-CRETE Stamped Overlay System



WIDE ARRAY OF TEXTURES & PATTERNS COMPRESSIVE STRENGTH 6000 PSI EASY TO MAINTAIN EXTERIOR OR INTERIOR APPLICATIONS ELIMINATES COSTLY CONCRETE REPLACEMENT RESIDENTIAL & COMMERICAL

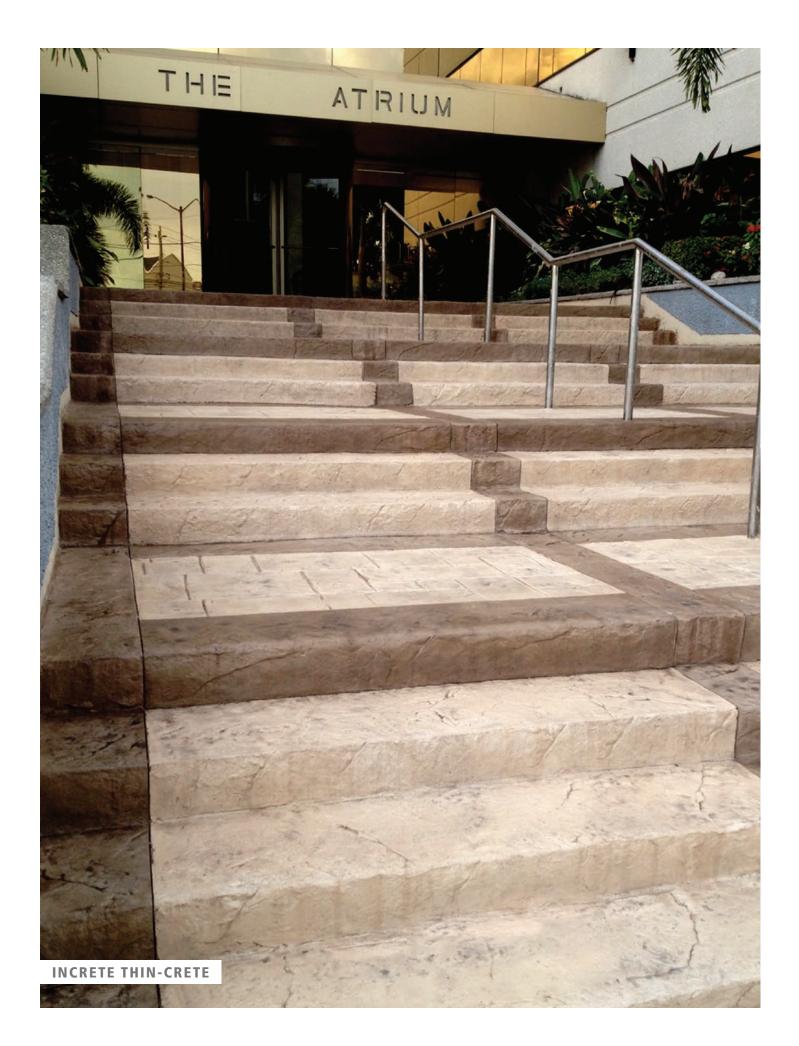

TRANSFORM PLAIN CONCRETE WHERE CONCRETE OVERLAYS AND THE BEAUTY OF NATURE COMBINE

Increte Thin-Crete overlays duplicate the grandeur of nature at a fraction of the cost without the mess or expense of removing structurally-sound concrete. With an array of patterns and hundreds of color combinations, the creative possibilities are limitless. Imagine a thin overlay that is durable, wear-resistant and low maintenance, and because there is no heaving, shifting or settling, Increte Thin-Crete is a superior alternative to pavers. Increte Thin-Crete adds value to both interior and exterior spaces and is perfect for residential and commercial driveways, sidewalks, entries, patios/lanais, pool decks and much more.





Increte Thin-Crete re-creates the beautiful look of nature with an easy-to-apply, cost-effective, durable overlay. Enhance existing concrete surfaces with the stunning look of natural stone, slate, granite, brick and even wood, in realistic deep-relief patterns. Thin, at less than 3/8" thick, yet tough, Increte Thin-Crete is perfect anywhere concrete is an option.





Ideal for: Driveways | Entrances | Walkways | Plazas | Decking | Landscaping

AN ENGINEERED SYSTEMS APPROACH

PRODUCT	DESCRIPTION	QUANTITY	COVERAGE
TAMMSWELD	A rewettable liquid bonding agent and polymer modifier for concrete and cement mortars.	1 gal (3.8 L) 5 gal (18.9 L)	150-250 ft ² (13-23 m ²) 750-1,250 ft ² (70-116 m ²)
INCRETE THIN-CRETE GROUT & COLOR PACK	Stampng grout designed to cover existing concrete. Mix with water and pre-measured color of your choice. Available in 30 standard colors.	50 lb (22.7 kg)	1/8"-50 ft ² (4.6 m ² @ 3 mm) 1/4"-25 ft ² (2 m ² @ 6 mm) 3/8"-15 ft ² (1.4 m ² @ 9 mm)
EUCOBAR	An evaporation retardant for concrete surfaces of all types that prevents rapid moisture loss.	1 gal (3.8 L) 5 gal (18.9 L)	2,000-4,000 ft ² (185-372 m ²) 10,000-20,000 ft ² (929-1858 m ²)
INCRETE LIQUID RELEASE	A clear, liquid release agent that easily frees stamping tools from grout overlays.	1 gal (3.8 L) 5 gal (18.9 L)	200 ft ² (18 m ²) 1,000 ft ² (93 m ²)
INCRETE ANTIQUING- AGENT	Secondary colorant for stamped concrete that tints grout lines and impressions without affecting the base color.	5 lb (2.2 kg)	5,000 ft² (464 m²)
INCRETE CLEAR SEAL	A clear, non-yellowing formula that will protect the surface while deepending and highlighting the color of concrete.	1 gal (3.8 L) 5 gal (18.9 L)	200-400 ft ² (18-37 m ²) 1,000-2,000 ft ² (93-185 m ²)
INCRETE SHUR-GRIP	A colorless, finely-graded, non-slip additive for sealers.	1 lb (0.45 kg) 15 lb (6.8 kg)	1,000 ft² (93 m²) 15,00 ft² (1,393 m²)

PATTERN VARIETIES

Unique custom looks that turn any property into a showplace. With over 100 stamping patterns available, visit our website for a complete listing.

www.euclidchemical.com

COLOR COMBINATIONS

35 standard colors result in hundreds of possible shade combinations. This printed color chart is for reference purposes only. Euclid Chemical recommends choosing colors from actual test samples.

5				
Kool White 400	Adobe Buff 010	Sandstone 730	Harvest Sand 370	Peach 540
Fiesta 320	Autumn Brown 050	Sun Buff 840	Austin Buff 047	Sand Buff 725
Desert Tan 275	Buckskin 107	Rust Brown 675	Walnut 940	Coral 190
Brick Red 100	Terra Cotta 875	Tile Red 895	Redwood 630	Maplewood 460
Saltillo 705	Sabal 685	Pewter 560	Silver Gray 770	Sun Gray 845
Gray 355	Charcoal 150	Philly Blue 570	Slate 785	Seafoam Green 740
White 970	Antique White 030	Sky Blue 780	Teal 865	Safety Yellow 695
			NOTE: This printed color chart is	for reference purposes only Euclid

NOTE: This printed color chart is for reference purposes only. Euclid Chemical recommends choosing colors from actual test samples.



1611 Gunn Highway Odessa, FL 33556 1-800-752-4626

BD07 Increte Thin-Crete © 2020 The Euclid Chemical Company. This material is provided for informational purposes only. The Euclid Chemical Company expressly disclaims any liability relating to the use of this material. Nothing stated herein shall give rise to or constitute any warranty by The Euclid Chemical Company, express or implied, including but not limited to any implied warranty of merchantability or fitness for a particular purpose. The information provided in this material is not intended to be all inclusive, as the manner in which any product is used or handled may involve other or additional considerations that are not addressed herein.

www.euclidchemical.com